



BARTH & CO
INTERNATIONAL

SECURE
dryback & softec

listen. convert. deliver.

"Founded in 1873 as an agency for round and sawn timber, we are now **producer, importer and service provider** for the European retail. We find it our responsibility to **listen** to the market, to **convert** the demand into strong concepts and to **deliver** products with the requested **quality, style and durability**. Today, we produce and import over 6.500 containers of **outdoor and indoor floors and wall** on a yearly basis."

- *Stephan von Schreitter, CEO F.W. Barth & Co GmbH*



style meets strength




blond
dryback 0610102
softtec 0610132

the best quality floor

wonderfully quiet

authentic look & feel

waterproof technology

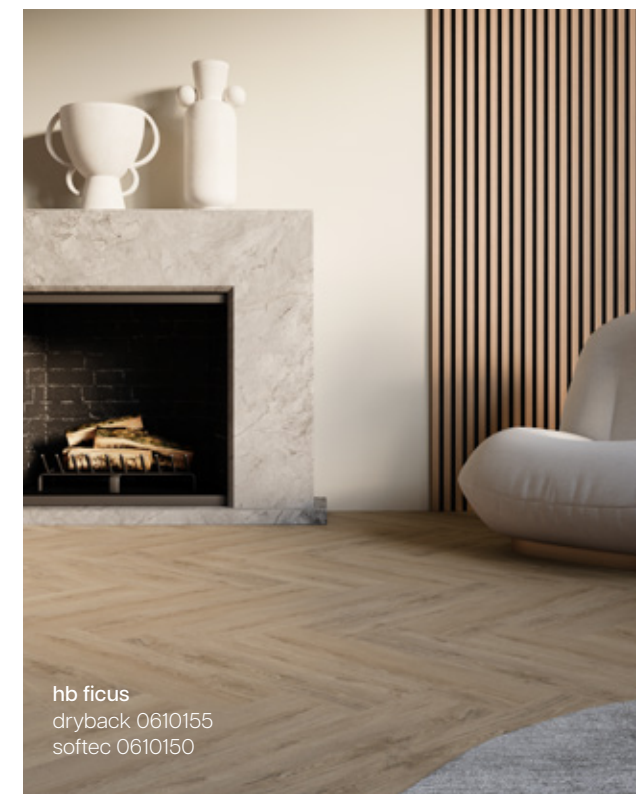

hb ficus
dryback 0610155
softtec 0610150

SECURE floors offer the ideal solution for modern living. With its stylish designs, robust durability, and easy maintenance, it's perfect for busy homes, professional spaces, and everything in between.

security first

The world is hectic and sometimes full of stress, but your home shouldn't be. Choose secure, worry-free living with your SECURE floor. Quality you can trust, and designed for ease and comfort. Because a secure home is a happy home. Enjoy the comfort of living with SECURE.



dessert sand
dryback 0610107
softec 0610137



QUIET

The elastic surface of SECURE floors dampens footsteps and vibrations - for pleasant room acoustics.



EASY TO CARE FOR

For reliable protection: the surface is completely sealed with a high-quality acrylic coating. Stains and dirt can be easily removed by sweeping, vacuuming or damp mopping.



WARM

SECURE floors feel cozy and soft - ideal for walking barefoot.



HIGH DURABILITY

SECURE floors are particularly hard-wearing thanks to their special wear layer.



SUITABLE FOR UNDERFLOOR HEATING SYSTEMS

Due to their good thermal conductivity, edge floors are ideally suited for installation on underfloor heating systems.



WATER RESISTANT

The high-quality acrylic coating does not allow any moisture to pass through. SECURE floors are therefore the ideal solution for wet rooms such as bathrooms or kitchens.


SECURE
dryback & softec

sunflower
dryback 0610152
softec 0610158

SECURE dryback

SECURE dryback is a **glue-down vinyl floor** suitable for residential and commercial spaces, including areas with hot water underfloor heating. It is available in authentic wood planks, herringbone design and extra-large stone tiles, featuring a durable wear layer with Matecta® surface protection.

Thanks to its super-flexible, elastic vinyl structure, the flooring is easy to install and offers high walking comfort. Its low installation height makes it ideal for renovation projects. Made from recyclable materials, SECURE dryback is a sustainable flooring solution.

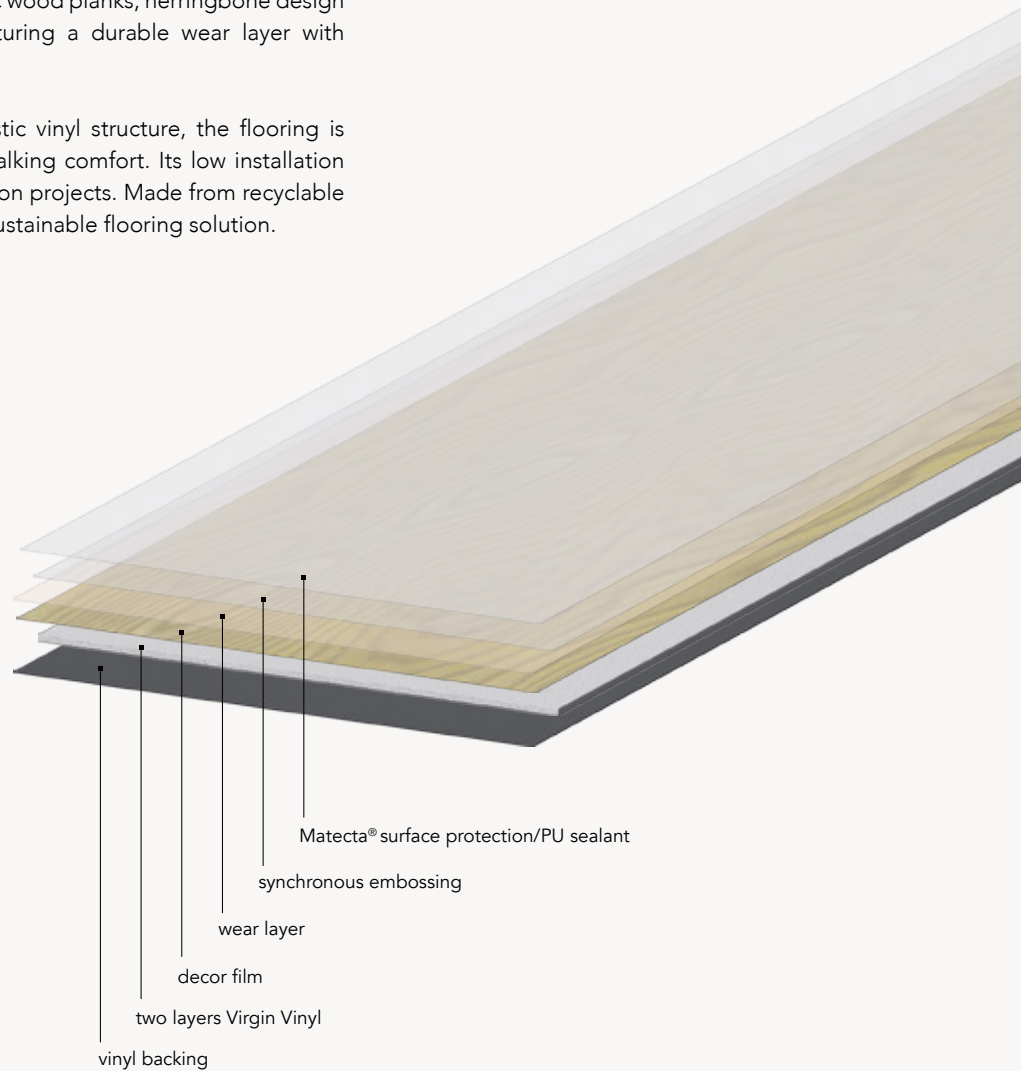

laying technology dryback


Complete bonding with commercially available wet bed adhesives.

description	norm	pcs/pack	m²/pack	packs/pallet	m²/pallet
dryback wood	1227 x 232 x 2,5mm/0.5	14	3,985	48	191,294
dryback tile	950 x 480 x 2,5mm/0.5	10	4,560	40	182,400
dryback herringbone	600 x 150 x 2,5mm/0.5	28	2,520	72	181,440

SECURE softec

SECURE softec is an innovative **hybrid design floor** with a compact carrier board for exceptional stability and load resistance. It is available in realistic wood, herringbone and stone decors with synchronous embossing. With a 0.5 mm wear layer, the floor is suitable for high-traffic areas, while the 1.5 mm vinyl layer ensures walking comfort and a warm surface.

Integrated **1.5 mm cork impact sound insulation** reduces noise effectively. Thanks to the L2C click and UNIZIP system, SECURE softec is quick and easy to install without adhesive. It combines durability, comfort, aesthetics and ease of installation in one high-quality flooring solution.

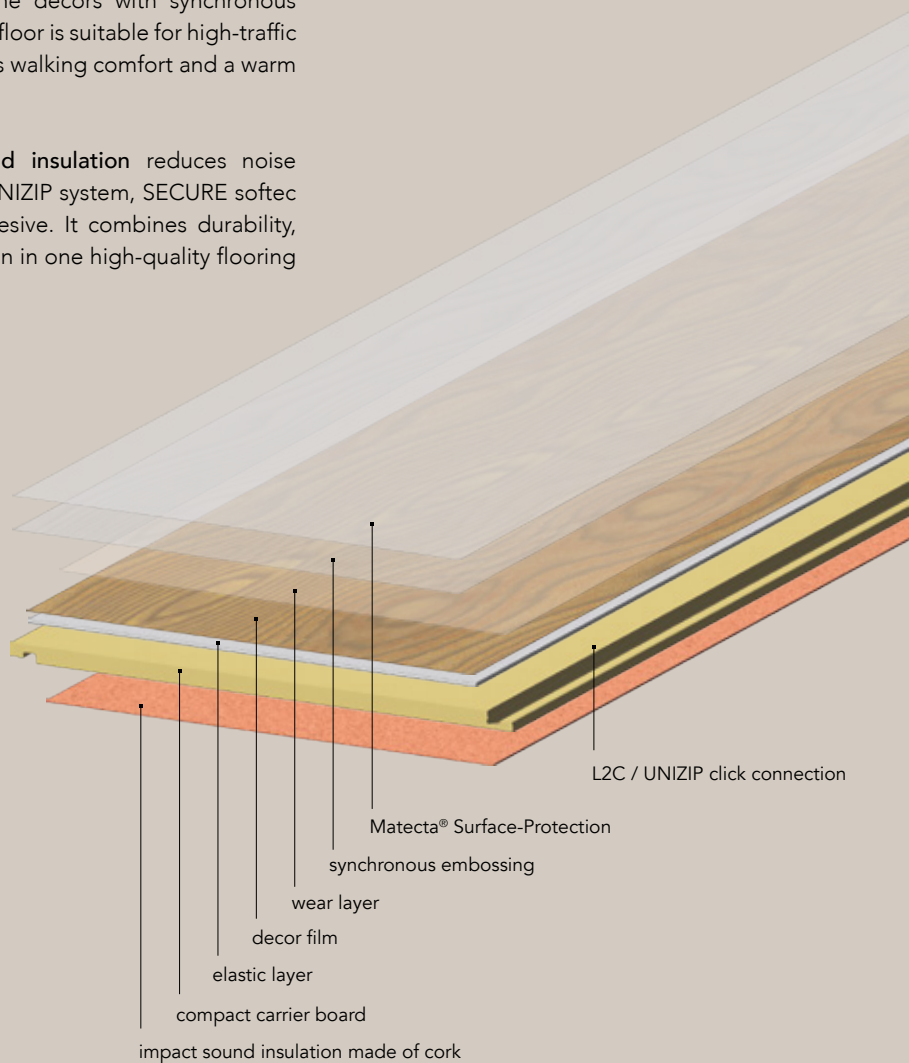

laying technology softec

The patented L2C click and UNIZIP system convinces with its simple angle mechanism, which allows the planks to be quickly, cleanly and easily into one another.

description	norm	pcs/pack	m²/pack	packs/pallet	m²/pallet
softec wood	1220 x 225 x 6,5+1,5mm/0.5	10	2,745	33	90,585
softec tile	940 x 470 x 6,5+1,5mm/0.5	6	2,651	33	87,476
softec herringbone	600 x 150 x 6,5+1,5mm/0.5	20	1,800	36	64,800

SECURE

dryback & softec



wearlayer 0.5 mm



wood



herringbone



tiles

secure wood

Dryback

1227 x 232 mm x 2,5 mm
0.5 wearlayer

- authentic design
- realistic matt surface thanks to Matecta® surface protection
- 4-sided micro bevelled edge



EIR matt

Softec

1220 x 225 mm x 6,5 + 1,5 mm
0.5 wearlayer

- authentic design
- realistic matt surface thanks to Matecta® surface protection
- quick and easy installation thanks to the L2C click connection
- includes 1,5mm cork underlay
- 4-sided micro bevelled edge



EIR matt




sand
dryback 0610101
softec 0610131



greige
dryback 0610100
softec 0610130



sand
dryback 0610101
softec 0610131

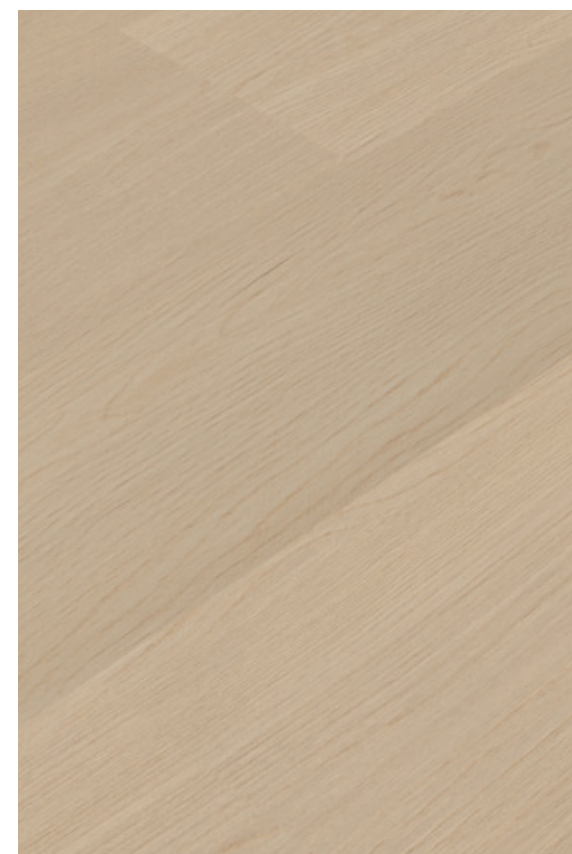

blond
dryback 0610102
softec 0610132



natural
dryback 0610103
softec 0610133



wearlayer 0.5 mm

secure wood



wearlayer 0.5 mm

secure wood



creme
dryback 0610104
softec 0610134



erica
dryback 0062019
softec 0080701



sophora
dryback 0062011
softec 0080709



genista
dryback 0062012
softec 0080702



smokey
dryback 0610105
softec 0610135



lindera
dryback 0062016
softec 0080706



ficus
dryback 0062015
softec 0080705



sunflower
dryback 0610152
softec 0610158



secure herringbone

Dryback

600 x 150 mm x 2,5 mm
0.5 wearlayer

- authentic design
- realistic matt surface thanks to Matecta® surface protection
- 4-sided micro bevelled edge



EIR matt

Softec

600 x 150 mm x 6,5 + 1,5 mm cork
0.5 wearlayer

- authentic design
- realistic matt surface thanks to Matecta® surface protection
- quick and easy installation thanks to the UNIZIP connection
- includes 1,5mm cork underlay
- 4-sided micro bevelled edge



EIR matt

UNIZIP
PATENTED TECHNOLOGY



hb greige
dryback 0610112
softec 0610142



hb sand
dryback 0610113
softec 0610143



hb natural
dryback 0610115
softec 0610145



hb blond
dryback 0610114
softec 0610144



hb natural
dryback 0610115
softec 0610145



wearlayer 0.5 mm

secure herringbone



hb ficus
dryback 0610155
softec 0610150



hb creme
dryback 0610116
softec 0610146



hb smokey
dryback 0610117
softec 0610147



hb sophora
dryback 0610153
softec 0610148



hb ficus
dryback 0610155
softec 0610150



hb genista
dryback 0610154
softec 0610149



hb sunflower
dryback 0610156
softec 0610151



wearlayer 0.5 mm

secure herringbone



secure tiles

Dryback

950 x 480 mm x 2,5 mm
0.5 wearlayer

- authentic design
- realistic matt surface thanks to Matecta® surface protection
- 4-sided micro bevelled edge



Softec

940 x 470 mm x 6,5 + 1,5 mm cork
0.5 wearlayer

- authentic design
- realistic matt surface thanks to Matecta® surface protection
- quick and easy installation thanks to the L2C click connection
- includes 1,5mm cork underlay
- 4-sided micro bevelled edge



cosmic latte
dryback 0610106
softec 0610136



cosmic latte
dryback 0610106
softec 0610136



dessert sand
dryback 0610107
softec 0610137



tuscan hazelnut
dryback 0610108
softec 0610138



cloud grey
dryback 0610109
softec 0610139




wearlayer 0.5 mm

secure tiles



charcoal grey
dryback 0610111
softec 0610141

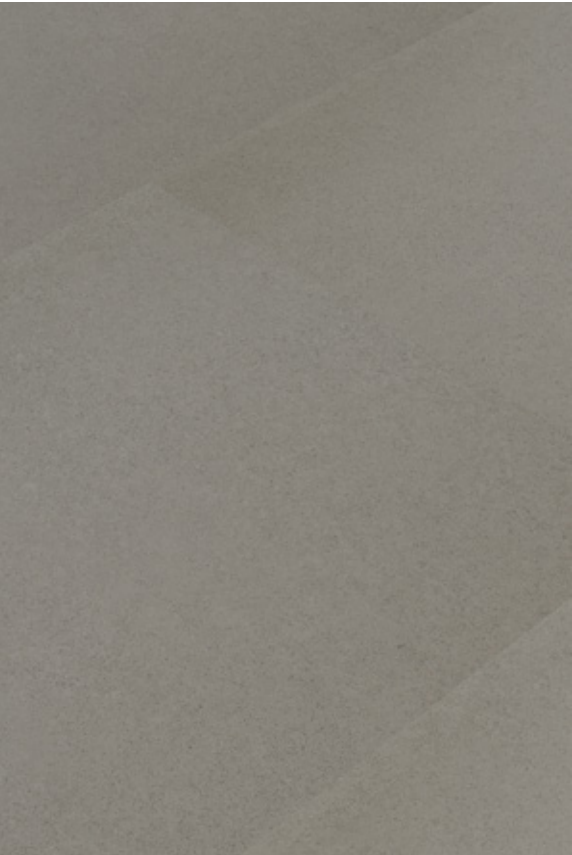

tempered moon
dryback 0610110
softec 0610140



charcoal grey
dryback 0610111
softec 0610141



concrete sand
dryback 0061803
softec 0080717



slate black
dryback 0061807
softec 0080721



wearlayer 0.5 mm

secure tiles



tempered moon
dryback 0610110
softec 0610140

Technical data

SECURE
dryback

Description	Norm	Dryback
Type of covering	EN ISO 10582	Heterogen, PVC
Surface finish		PUR
Weight per unit area	EN ISO 23997	4.8 kg/m²
Classification	EN ISO 10874	33/42
Total thickness	EN ISO 24346	2.5 mm
Wear layer thickness	EN ISO 24340	0.5 mm
Dimensional stability	EN ISO 23999	0.05 % quer
Residual impression	EN ISO 24343-1	0.05 mm
Color fastness	EN ISO 105-B02	Stufe >6
Fire behavior	EN 13501-1	Bfl-S1
Slip resistance	EN 13893	0.35 / DS
Slip resistance	DIN 51130	R10
Impact sound improvement	EN ISO 10140-3	ca. 5 dB
Thermal resistance	ASTM-C518-17	0.017 m² K/W
Chemical resistance	EN ISO 26987	Yes*
Wear group	EN ISO 10582	Typ 1
Chair castor suitability	ISO 4918	Yes, Typ W, EN12529
Underfloor heating	EN1264-2	suitable, max. 28°
Emission test according AgBB scheme		Very low emission

* Resistant, depending on concentration and exposure time, to typical household chemicals.

Laying technology dryback

Complete bonding with commercially available wet bed adhesives.



Technical data

SECURE
softec

Description	Norm	Default values		Value
Thickness	EN 10582	± 0.5 mm		8.0 mm
Wear layer	EN 426	± 0.1 mm		0.5 mm
Squareness	EN 427	≤ 0.25 mm		0.17 mm
Height difference (assembled)	EN 427	≤ 0.1 mm		0.06 mm
Opening between elements (assembled)	EN 427	≤ 0.1 mm		0.05 mm
Warpage after exposure to heat	EN 434	≤ 2.0 mm		0.25 mm
Density (compact support panel)	EN 436	Compact carrier plate: ≥ 1.000 kgs/m3		1045 kgs/m3
Density	EN 436	Finished product: ≥ 1000 kgs/m3		1080 kgs/m3
Dimensional stability	EN 434	70°C 6 hour Width/Length ≤ 2.5%		0,40%
Click-lock strength	EN 433	≥ 3 N/mm		6.0 N/mm
Peel strength	EN 431	Peel strength between print film wear layer and LVT ≥ 75 N/50mm		86N/mm
Chair castor suitability	EN 425	1.with impact sound IXPE or cork ≥ 15.000 2. without impact sound ≥ 25.000"		15600
Colour fastness	EN ISO 105-B02			Stufe 6
Abrasion resistance	EN 660-2	Fv/mm2		T
Fire behaviour	EN 13501-1			Bf1 S1
Formaldehyde emissions	EN 717-1	E1		E1
Slip resistance	DIN 51130	R10		R10
Slip resistance	EN 13893	DS		DS
Impact sound improvement index	EN ISO 10140-3			16 DB
Thermal conductivity	EN 12664:2001			0.088 W/(m x K)
Thermal resistance	EN 12664:2001			0.091 (m 2 x K)/W
Heavy metal load	EN71-3	Total Lead (Pb)	≤ 100	ND
		SOL. Lead (Pb)	≤ 90	ND
		SOL. Mercury (Hg)	≤ 60	ND
		SOL. Chromium (Cr)	≤ 60	ND
		SOL. Arsenic (As)	≤ 25	ND
		SOL. Antimony (Sb)	≤ 60	ND
		SOL. Barium (Ba)	≤1000	ND
		SOL. Selenium (Se)	≤500	ND
		SOL. Cadmium (Cd)	≤ 75	ND

Laying technology SofTEC®

The patented L2C click system convinces with its simple angle mechanism, which allows the planks to be quickly, cleanly and easily into one another.



SECURE dryback

collection		article number		wearlayer	texture	bevel	pcs/pack	sqm per pack (m²)	packs per pallet (m²)	sqm per pallet (m²)
SECURE dryback wood	1227 x 232 x 2.5mm/0.5	db greige	0610100	0,50	EIR	4 micro bevel	14	3,9853	48	191,2940
		db sand	0610101	0,50	EIR	4 micro bevel	14	3,9853	48	191,2940
		db blond	0610102	0,50	EIR	4 micro bevel	14	3,9853	48	191,2940
		db natural	0610103	0,50	EIR	4 micro bevel	14	3,9853	48	191,2940
		db creme	0610104	0,50	EIR	4 micro bevel	14	3,9853	48	191,2940
		db smokey	0610105	0,50	EIR	4 micro bevel	14	3,9853	48	191,2940
		db sunflower	0610152	0,50	EIR	4 micro bevel	14	3,9853	48	191,2940
		db genista	0062012	0,50	EIR	4 micro bevel	14	3,9853	48	191,2940
		db ficus	0062015	0,50	EIR	4 micro bevel	14	3,9853	48	191,2940
		db sophora	0062011	0,50	EIR	4 micro bevel	14	3,9853	48	191,2940
		db lindera	0062016	0,50	EIR	4 micro bevel	14	3,9853	48	191,2940
		db erica	0062019	0,50	EIR	4 micro bevel	14	3,9853	48	191,2940
SECURE dryback herringbone	600 x 150 x 2.5mm/0.5	db hb greige	0610112	0,50	EIR	4 micro bevel	28	2,5200	72	181,4400
		db hb sand	0610113	0,50	EIR	4 micro bevel	28	2,5200	72	181,4400
		db hb blond	0610114	0,50	EIR	4 micro bevel	28	2,5200	72	181,4400
		db hb natural	0610115	0,50	EIR	4 micro bevel	28	2,5200	72	181,4400
		db hb creme	0610116	0,50	EIR	4 micro bevel	28	2,5200	72	181,4400
		db hb smokey	0610117	0,50	EIR	4 micro bevel	28	2,5200	72	181,4400
		db hb sophora	0610153	0,50	EIR	4 micro bevel	28	2,5200	72	181,4400
		db hb genista	0610154	0,50	EIR	4 micro bevel	28	2,5200	72	181,4400
		db hb ficus	0610155	0,50	EIR	4 micro bevel	28	2,5200	72	181,4400
		db hb sunflower	0610156	0,50	EIR	4 micro bevel	28	2,5200	72	181,4400
SECURE dryback tiles	950 x 480 x 2.5mm/0.5	db concrete sand	0061803	0,50	slate emboss	4 micro bevel	10	4,5600	40	182,4000
		db slate black	0061807	0,50	slate emboss	4 micro bevel	10	4,5600	40	182,4000
		db cosmic latte	0610106	0,50	slate emboss	4 micro bevel	10	4,5600	40	182,4000
		db desert sand	0610107	0,50	slate emboss	4 micro bevel	10	4,5600	40	182,4000
		db tuscan hazelnut	0610108	0,50	slate emboss	4 micro bevel	10	4,5600	40	182,4000
		db cloud grey	0610109	0,50	slate emboss	4 micro bevel	10	4,5600	40	182,4000
		db tempered moon	0610110	0,50	slate emboss	4 micro bevel	10	4,5600	40	182,4000
		db charcoal grey	0610111	0,50	slate emboss	4 micro bevel	10	4,5600	40	182,4000

SECURE

softec

collection		article number		wearlayer	texture	bevel	pcs/pack	sqm per pack (m²)	packs per pallet (m²)	sqm per pallet (m²)
SECURE softec wood	1220 x 225 x 6,5+1,5mm/0.5	softec greige	0610130	0,50	EIR	4 micro bevel	10	2,7450	33	90,585
		softec sand	0610131	0,50	EIR	4 micro bevel	10	2,7450	33	90,585
		softec blond	0610132	0,50	EIR	4 micro bevel	10	2,7450	33	90,585
		softec natural	0610133	0,50	EIR	4 micro bevel	10	2,7450	33	90,585
		softec creme	0610134	0,50	EIR	4 micro bevel	10	2,7450	33	90,585
		softec smokey	0610135	0,50	EIR	4 micro bevel	10	2,7450	33	90,585
		softec sunflower	0610158	0,50	EIR	4 micro bevel	10	2,7450	33	90,585
		softec genista	0080702	0,50	EIR	4 micro bevel	10	2,7450	33	90,585
		softec ficus	0080705	0,50	EIR	4 micro bevel	10	2,7450	33	90,585
		softec sophora	0080709	0,50	EIR	4 micro bevel	10	2,7450	33	90,585
		softec lindera	0080706	0,50	EIR	4 micro bevel	10	2,7450	33	90,585
		softec erica	0080701	0,50	EIR	4 micro bevel	10	2,7450	33	90,585
SECURE softec herringbone	600 x 150 x 6,5+1,5mm/0.5	softec hb greige	0610142	0,50	EIR	4 micro bevel	20	1,8000	36	64,800
		softec hb sand	0610143	0,50	EIR	4 micro bevel	20	1,8000	36	64,800
		softec hb blond	0610144	0,50	EIR	4 micro bevel	20	1,8000	36	64,800
		softec hb natural	0610145	0,50	EIR	4 micro bevel	20	1,8000	36	64,800
		softec hb creme	0610146	0,50	EIR	4 micro bevel	20	1,8000	36	64,800
		softec hb smokey	0610147	0,50	EIR	4 micro bevel	20	1,8000	36	64,800
		softec hb sophora	0610148	0,50	EIR	4 micro bevel	20	1,8000	36	64,800
		softec hb genista	0610149	0,50	EIR	4 micro bevel	20	1,8000	36	64,800
		softec hb ficus	0610150	0,50	EIR	4 micro bevel	20	1,8000	36	64,800
		softec hb sunflower	0610151	0,50	EIR	4 micro bevel	20	1,8000	36	64,800
SECURE softec tiles	940 x 470 x 6,5+1,5mm/0.5	softec concrete sand	0080717	0,50	slate emboss	4 micro bevel	6	2,6508	33	87,476
		softec slate black	0080721	0,50	slate emboss	4 micro bevel	6	2,6508	33	87,476
		softec cosmic latte	0610136	0,50	slate emboss	4 micro bevel	6	2,6508	33	87,476
		softec desert sand	0610137	0,50	slate emboss	4 micro bevel	6	2,6508	33	87,476
		softec tuscan hazelnut	0610138	0,50	slate emboss	4 micro bevel	6	2,6508	33	87,476
		softec cloud grey	0610139	0,50	slate emboss	4 micro bevel	6	2,6508	33	87,476
		softec tempered moon	0610140	0,50	slate emboss	4 micro bevel	6	2,6508	33	87,476
		softec charcoal grey	0610141	0,50	slate emboss	4 micro bevel	6	2,6508	33	87,476

BARTH & CO

INTERNATIONAL

Fuggerstraße 25
41352 Korschenbroich
Germany

info@barth1873.de
+49 2161 995 599
www.barth1873.de